
Nairo Ex-Proof LED Projektörler

Ana Ölçüler / Montaj Ölçüleri


Gövde	Elektrostatik toz boya kaplı alüminyum enjeksiyon
LED	SMD Mid Power
Optik	IK 08 koşullarını sağlayan, suya ve darbelere karşı dayanıklı, şeffaf temperli cam
Sürücü	ENEC belgeli
Gaz Patlama Koruması	Zone 2
Toz Patlama Koruması	Zone 22



axbxcxd	
50W	342x342x121mm
75W	342x342x121mm
100W	342x342x121mm
125W	342x342x121mm
150W	342x342x121mm
175W	342x342x121mm
200W	342x342x121mm

Güç (W)	Tip	Renk Sıcaklığı (K)	Toz Patlama Koruması	Gaz Patlama Koruması	Ağırlık (Kg)	Ral Kodu
50	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
75	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
100	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
125	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
150	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
175	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
200	LED	3000/4000/6500	Zone 22	Zone 2	8	1023

Nairo Ex-Proof LED Projektör MONTAJ ŞARTNAMESİ

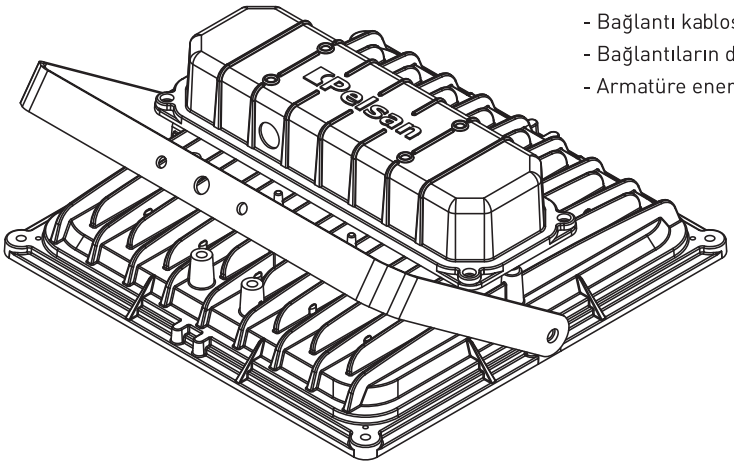

- Armatürün çalışma gerilimi ile şebeke gerilimi aynı olmalıdır. (220-240V/50-60Hz)
- Armatürün elektriksel bağlantısı yapılmadan önce mutlaka şebekenin gerilimi ve bağlantı çalışmaları yapıldığına dair pano üzerine bir levha asılmalıdır.
- Ardından sağlam bir zemine konsol üzerindeki delikler yardımı ile konsolun bağlantısını yapınız.
- Ex-Proof ürünlerin montajı yapılırken harici gövde topraklaması gerekmektedir.
- Bağlantı kablosunda güvenlik açısından ek olmaması gerekmektedir.
- Bağlantıların doğru olup olmadığını kontrol ediniz.
- Armatüre enerji veriniz.

Güvenlik Uyarıları!

- Armatür montajını deneyimli ve ehliyetli bir elektrikçiye yaptırınız.
- Kurulum ve bakım işlemlerinden önce şebeke elektriğini kesiniz.
- Armatürü temizlerken sabunlu bir bez kullanınız.
- Kesinlikle tiner ve benzeri yanıcı, zarar verici malzemeler kullanmayınız.
- Ürünü 220-240 V AC / 50-60 Hz şebeke geriliminde kullanınız.
- Patlayıcı ortam ihtimali olduğunda açmayınız. Yük altında açmayınız.


Pelsan Aydınlatma San. ve Tic. A.Ş
İmes Sanayi Sitesi A Blok 101 Sokak No:38 Umraniye / İstanbul
Tel: 0850 460 75 76 www.pelsan.com.tr info@pelsan.com.tr

IP66 220-240V 50-60Hz IK08 EN 60598-2-5

Nairo Ex-Proof LED Floodlights

Main Dimensions / Installation Dimensions

Body	Aluminum Injection with electrostatic coating
LED	SMD Mid Power
Optic	IK 80 standard compliant, heat and impact resistant, high tranmission, clear tempered glass
Driver	ENEC certified
Gas Explosion Protection	Zone 2
Dust Explosion Protection	Zone 22




	axbxcxd
50W	342x342x121mm
75W	342x342x121mm
100W	342x342x121mm
125W	342x342x121mm
150W	342x342x121mm
175W	342x342x121mm
200W	342x342x121mm

Power (W)	Type	Colour Temp. (K)	Dust Explasion Protection	Gas Explasion Protection	Weight (Kg)	Ral Code
50	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
75	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
100	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
125	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
150	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
175	LED	3000/4000/6500	Zone 22	Zone 2	8	1023
200	LED	3000/4000/6500	Zone 22	Zone 2	8	1023

Nairo Ex-Proof LED Floodlights INSTALLATION SPECIFICATIONS

- The working of the voltage must be the same as the line voltage (220-240V/50-60Hz)
- Before making electric bonding of the fixture, the plate must be mounted on the panel about the working of the line voltage and the connection
- Make the connection of the consol with the aid of on the durable ground.
- External body grounding is reguired when mounting ex-proof products.
- Based on the security, it shall not be the addition on the connection cable.
- Control the connection is correct or not.
- Give energy to the fixture.

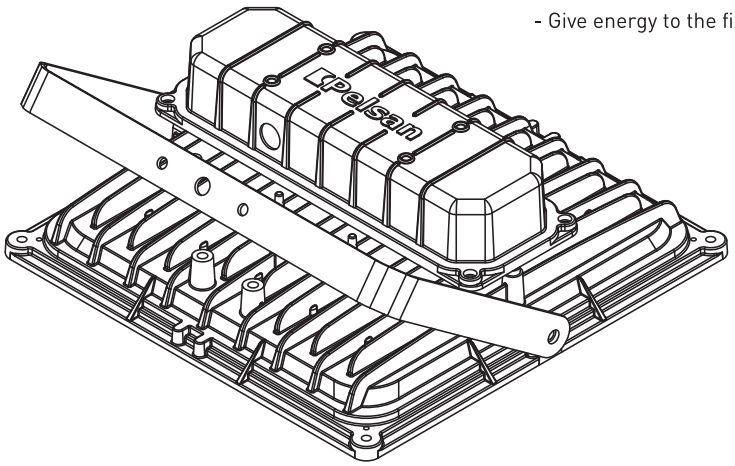

Safety Warnings!

- The luminaire should be installed by an experienced and licensed electrician.
- The grid electricity should be turned off before installation and maintenance.
- The luminaire should be cleaned with a soapy cloth.
- Thinner or similar flammable, harmful cleaning substances should be avoided.
- The product should be operated at a 220-240 V AC / 50-60 Hz grid.
- Do not open the product under load when there is a possibility of explosive atmosphere.

Pelsan Aydınlatma San. ve Tic. A.Ş
İmes Sanayi Sitesi A Blok 101 Sokak No:38 Umraniye / İstanbul
Tel: 0850 460 75 76 www.pelsan.com.tr info@pelsan.com.tr

IP66 220-240V 50-60Hz IK08 EN 60598-2-5