

	W2R-63A
Rated İnsulation Voltage Ui	AC 690V,50Hz
Rated Operating Voltage Ue	AC 400V,50Hz
Use Category	AC31B,AC33İB
Conformity to Standart	IEC 60947-6-1
Rated Making and Breaking Capacity	6.0Ie,1.05Ue,50 times
Operating Performance	2.0Ie,1.05Ue,6000 times
Rated Limit Short-Circuit Current Iq	50kA
Rated İmpulse Withstand Voltage	8kV
Control Circuit	AC 220V,50Hz 85%Us-110%Us
Auxiliary Circuit	AC 220V,50Hz Ie=6A
Contact Conversion Time	< 1s
Conversion Action Time	< 1s
Return to Action Time	< 1s
Disconnect the Power Time	< 1s

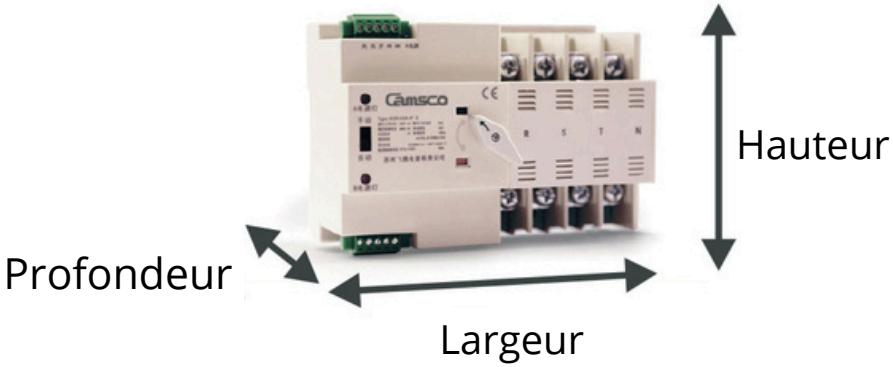

Ampère	Largeur(mm)	Hauteur(mm)	Profondeur (mm)
4x63	143	96	77

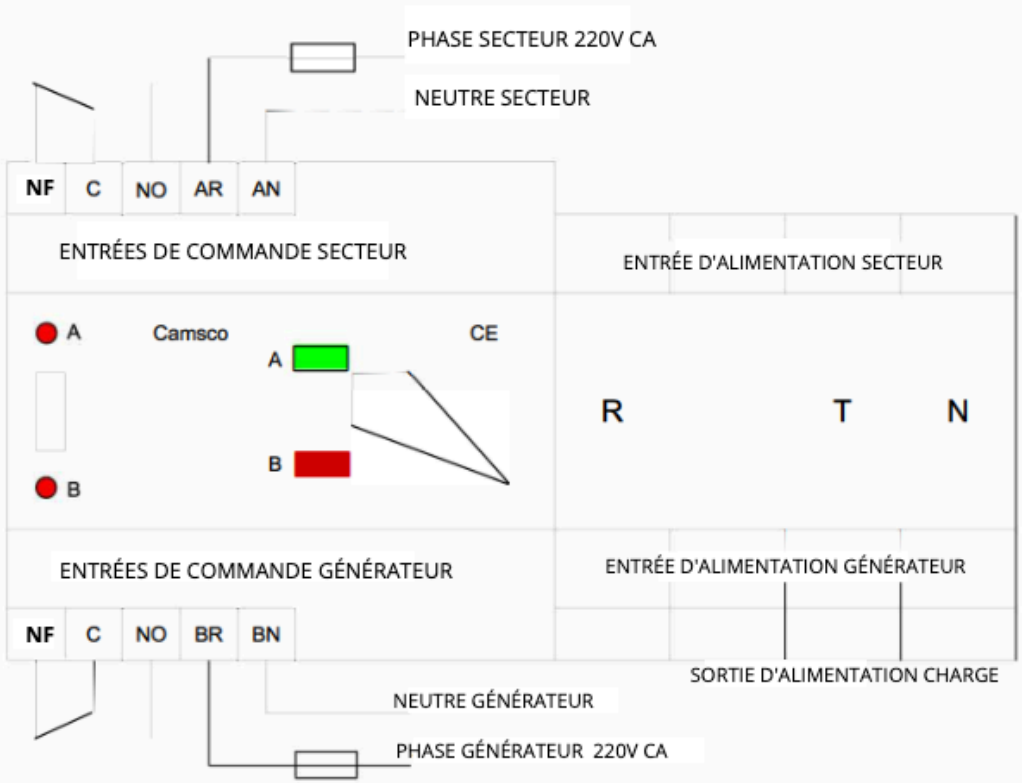

ats
kontrol sistemleri